


CANFORD SDV-L CABLE

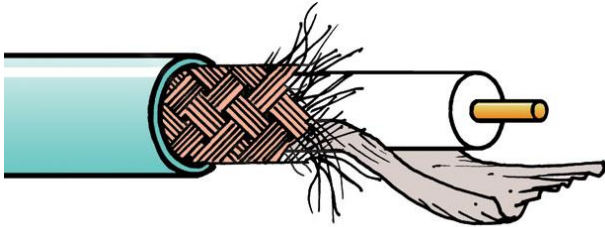

36-520 CANFORD SDV-L CABLE Black

36-526 CANFORD SDV-L CABLE Turquoise

Low-loss coaxial 75 ohm cable specifically for 3GHz HDTV and serial digital video signals.

Mechanical Data

Inner Conductor:	1.00mm Plain Copper Wire.	
Dielectric:	Gas injected foam high density polyethylene, 4.8mm O.D.	
Screen 1:	Aluminium/polypropylene/aluminium tape	
Screen 2:	Tinned copper braid, optical coverage 95%	
Screening efficiency:	95%	
Construction:	Coaxial cable Plain Copper Conductor Foamed Polyethylene Dielectric wrapped with Aluminium//Poly/Aluminium Tape Tinned Copper Braid PVC Outer Jacket	
Jacket:	PVC, black or turquoise	
Overall Diameter:	6.80mm	Nominal
Weight:	6.9kg/100m	Nominal
Minimum bend radius:	35mm indoor	70mm outdoor
Temperature range:	-20° C to + 80° C	
Reel length:	1000m	
Cut lengths:	Available in any multiple of 1 metre	

Electrical Data

Impedance:	75 ohms +/-1%	
Capacitance(s):	54pF/m Nominal.	
Inner Conductor(s):	28 Ohms/km Max.	
Outer Conductor(s):	19 Ohms/km Max./screens	

Attenuation:	MHz	dB/100m
	10	2.0
	100	6.7
	200	9.2
	750	18.4
	1500	26.5
	3000	38.3
	6000	56.8
	9000	69.6
	12000	80.3

Return Loss:	26dB:	50-300MHz
	22dB:	300-3000MHz
	18dB:	3000-3500MHz
	15dB:	3500-5000MHz

Velocity of Propagation: 80% Nominal

Manufactured specifically for Canford by Draka Prysmium Multimedia.
'SDV' is a registered trademark of Canford Audio Limited.